





# C104 Series

## D-Sub H.D. Solder Type



### Specifications:

Contact Resistance: 30mΩ @ 100mA DC  
 Insulator Resistance: 1000MΩmin. @ 500V DC  
 Current Rating: 3AMP  
 Voltage: 1000V AC For 1 minute  
 Operating Temperature: -55°C~+105°C  
 Contact: Brass or Phosphor Bronze, Stamped  
 Housing: PBT, UL94V-0

<Male>

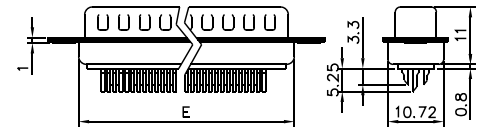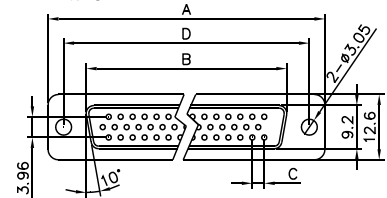

<Female>

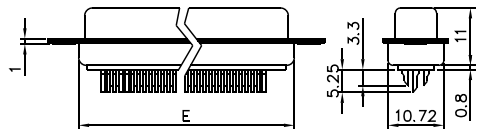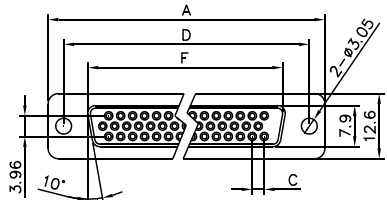

### Ordering Information

C104 - 26 FT B 0

- Series No. \_\_\_\_\_
- No. of Pins: \_\_\_\_\_  
15,26,44,62
- Gender: \_\_\_\_\_  
M - Male  
F - Female
- Shell Plating: \_\_\_\_\_  
C - Chromeplated  
T - Tinned
- Screw Type: \_\_\_\_\_  
0 - W/O Screws  
1 - Screw #4-40
- Insulator Colour: \_\_\_\_\_  
B - Blue  
K - Black  
W - White

Positions	A	B	C	D	E	F
15	30.90	17.70	2.29	24.99	19.30	16.33
26	39.10	25.30	2.29	33.32	27.50	24.70
44	53.00	39.00	2.29	47.04	41.30	38.40
62	69.30	55.40	2.41	63.50	57.70	54.80