

Ordering Information

C105 - 26 F T B 0

- | | |
|--|-----------------------------------|
| Series No. | Screw Type: |
| No. of Pins:
15,26,44,62 | 0 - W/O Screws
1 - Screw #4-40 |
| Gender:
M - Male
F - Female | Insulator Colour: |
| Shell Plating:
C - Chromeplated
T - Tinned | B - Blue
K - Black
W- White |

C105 Series



D-Sub H.D. Dip Type, Straight

Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 3AMP
 Voltage: 1000V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

Positions	A	B	C	D	E	F
15	30.90	17.70	2.29	24.99	19.30	16.33
26	39.10	25.30	2.29	33.32	27.50	24.70
44	53.00	39.00	2.29	47.04	41.30	38.40
62	69.30	55.40	2.41	63.50	57.70	54.80

<Male>

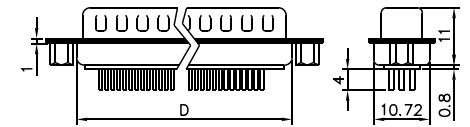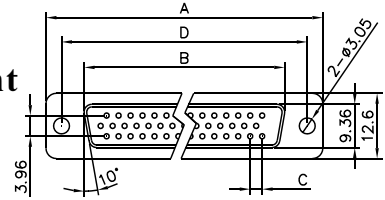

<Female>

