





C110 Series

IDC Socket, 2.54mm(0.100")

Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

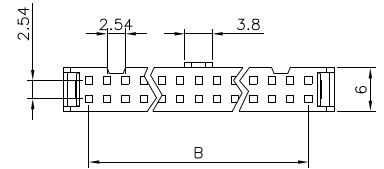

Ordering Information

C110 - 26 T A K

Series No. _____
 No. of Pins: _____
 08,10,14,16,20,
 24,26,30,34,40,
 44,50,60,64
 Contact Plating: _____
 G - All Gold Plated
 T - Tinned Terminal
 & Gold Plated Contact
 Insulator Colour:
 K - Black
 G - Gray
 Strain Relief:
 A - Strain Relief
 B - W/O Strain Relief

Positions	A	B	Positions	A	B
08	14.73	7.62	30	42.67	35.56
10	17.27	10.16	34	47.75	40.64
14	22.35	15.24	40	55.37	48.26
16	24.89	17.78	50	68.07	60.96
20	29.97	22.86	60	80.77	73.66
26	37.59	30.48	64	85.85	78.74