

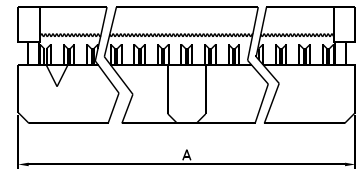



C111 Series

IDC Socket, 2.0mm(0.079")

Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

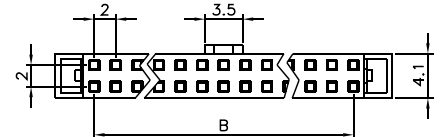

Ordering Information

C111 - 26 T A K

Series No. _____
 No. of Pins: _____
 08,10,14,16,20,
 24,26,30,34,40,
 44,50,60,64
 Contact Plating: _____
 G - All Gold Plated
 T - Tinned Terminal
 & Gold Plated Contact
 Insulator Colour: _____
 K - Black
 G - Gray
 Strain Relief: _____
 A - Strain Relief
 B - W/O Strain Relief

Positions	A	B	Positions	A	B
08	13.2	6.0	30	35.2	28.0
10	15.2	8.0	34	39.2	32.0
14	19.2	12.0	40	45.2	38.0
16	21.2	14.0	44	49.2	42.0
20	25.2	18.0	50	55.2	48.0
24	29.2	22.0	60	65.2	58.0
26	31.2	24.0	64	69.2	62.0