


C112-A Series

Pin Header, 2.54mm(0.100")


Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

<Single Row>

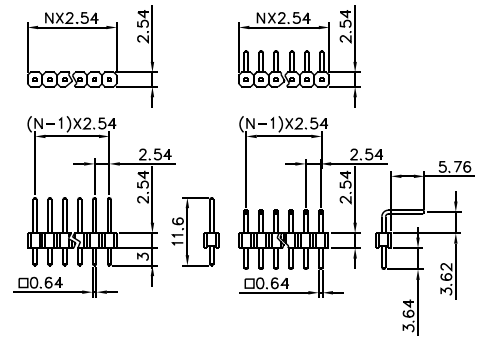

<Dual Row>

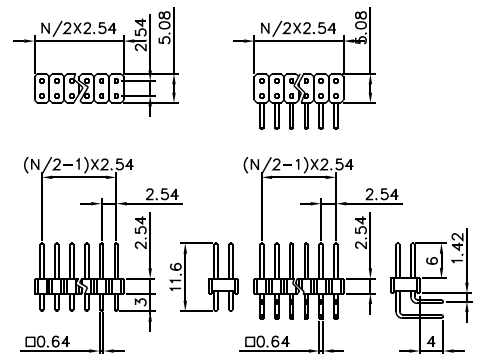

Ordering Information

C112-A-D S 80 G

Series No. | Contact Plating:
 D - Dual Row | T - Tinned
 S - Single Row | G - Gold Flash All Over
 Pin Direction: | No. of Pins:
 S - Straight | 02~40 for Single Row
 R - Right Angle | 04~80 for Dual Row