


C112-B Series

Pin Header, 1.27mm(0.050")


Specifications:

Contact Resistance: $30m\Omega @ 100mA$ DC
 Insulator Resistance: $1000M\Omega min. @ 500V$ DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: $-55^{\circ}C \sim +105^{\circ}C$
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: Nylon 6T, UL94V-0

<Right Angle>

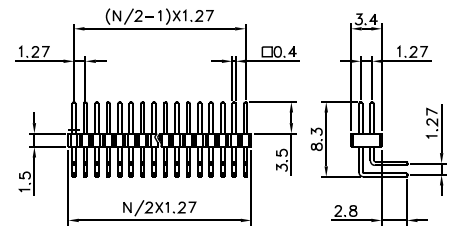

<Straight>

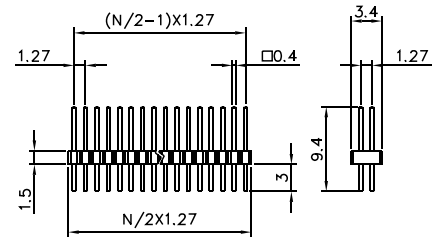

Ordering Information

C112-B - D S 80 G 1

Series No.

D - Dual Row
 S - Single Row

Pin Direction:
 S - Straight
 R - Right Angle

No. of Pins:
 02~50 for Single Row
 04~100 for Dual Row

Plastic Thickness:
 2 - 1.00mm
 3 - 1.50mm
 4 - 2.00mm
 5 - 2.54mm

Contact Plating:
 T - Tinned
 G - Gold Flash All Over