



C112-D Series

**Pin Header, 1.27mm(0.050"),
SMT Type**

Specifications:

Contact Resistance: $30\text{m}\Omega @ 100\text{mA DC}$
 Insulator Resistance: $1000\text{M}\Omega\text{min. @ } 500\text{V DC}$
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: Nylon 6T, UL94V-0

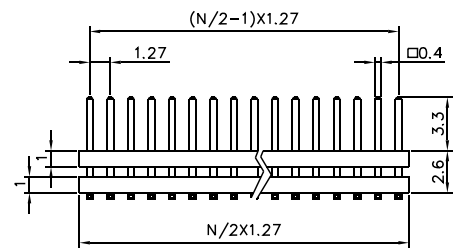

Ordering Information

C112-D - 60 G 2

Series No. — Plastic Thickness: 2 - 1.00mm
 No. of Pins: 02~100
 Contact Plating: T - Tinned
 G - Gold Flash All Over