


# C114-A Series

PCB Socket, 2.54mm(0.100")


### Specifications:

Contact Resistance:  $30m\Omega @ 100mA DC$   
 Insulator Resistance:  $1000M\Omega min. @ 500V DC$   
 Current Rating: 1AMP  
 Voltage: 500V AC For 1 minute  
 Operating Temperature:  $-55^{\circ}C \sim +105^{\circ}C$   
 Contact: Brass or Phosphor Bronze, Stamped  
 Housing: PBT, UL94V-0

### <Single Row>

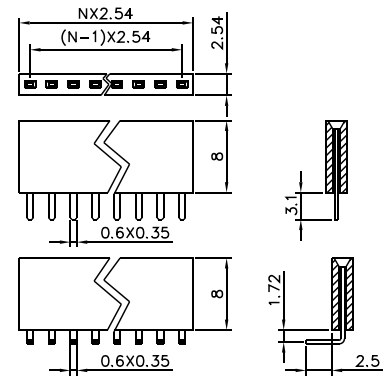

### <Dual Row>

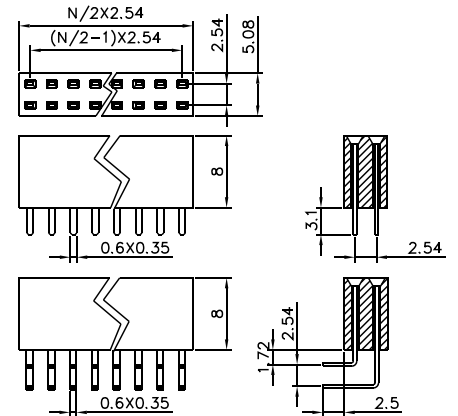

### Ordering Information

C114-A - D S 80 G

Series No. | Contact Plating:  
 D - Dual Row | T - Tinned  
 S - Single Row | G - Gold Flash All Over  
 Pin Direction: | No. of Pins:  
 S - Straight | 02~40 for Single Row  
 R - Right Angle | 04~80 for Dual Row