



# C117-B Series

**Female Header, 1.27mm(0.050"),  
SMT Type**

**Specifications:**

Contact Resistance: 30mΩ @ 100mA DC  
 Insulator Resistance: 1000MΩmin. @ 500V DC  
 Current Rating: 1AMP  
 Voltage: 500V AC For 1 minute  
 Operating Temperature: -55°C~+105°C  
 Contact: Brass or Phosphor Bronze, Stamped  
 Housing: Nylon 6T, UL94V-0

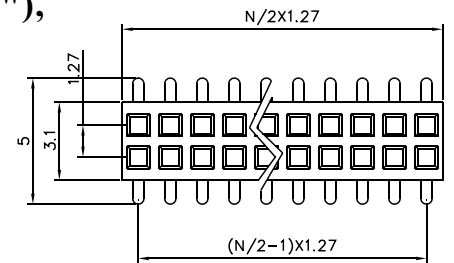

**Ordering Information**

C117-B - 80 G  
 Series No. | Contact Plating:  
                   T - Tinned  
                   G - Gold Flash All Over  
                   No. of Pins:  
                   06~100