


C118-A Series

Box Header, 2.54mm(0.100")


Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

<Straight>

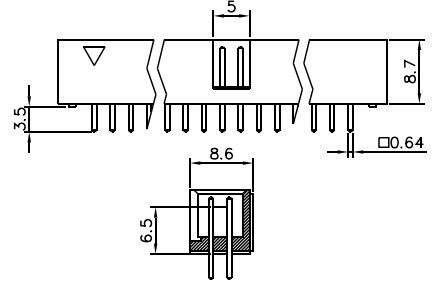

<Right Angle>

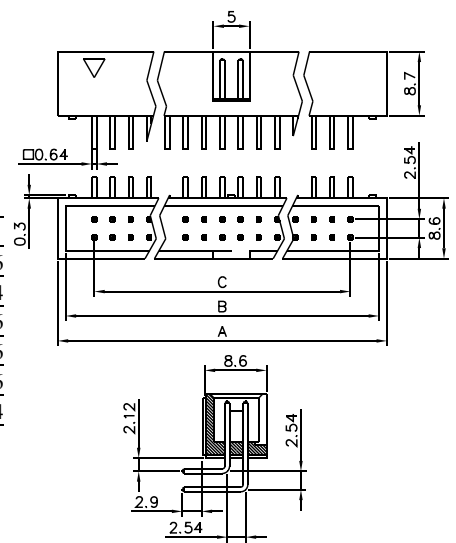

Ordering Information

C118-A - 40 T S K

Series No. _____
 No. of Pins: _____
 10,12,14,16,20,26,
 30,34,40,50,60,64
 Contact Plating: _____
 T - Tinned Terminal &
 Gold Contact
 G- Gold Flash All Over

Insulator Colour: _____
 K - Black
 G - Gray
 Pin Direction: _____
 S - Straight
 R - Right Angle

Pos.	A	B	C
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
26	40.62	38.42	30.48

Pos.	A	B	C
30	45.70	43.50	35.56
34	50.78	48.58	40.64
40	58.40	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	88.88	86.68	78.74