


# C118-B Series

**Box Header, 2.0mm(0.079")**




### Specifications:

Contact Resistance: 30mΩ @ 100mA DC  
 Insulator Resistance: 1000MΩmin. @ 500V DC  
 Current Rating: 1AMP  
 Voltage: 500V AC For 1 minute  
 Operating Temperature: -55°C~+105°C  
 Contact: Brass or Phosphor Bronze, Stamped  
 Housing: PBT, UL94V-0

<Straight>

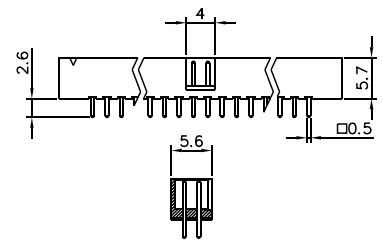

<Right Angle>

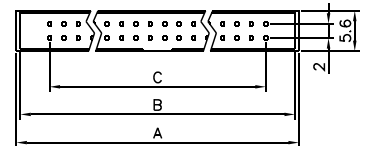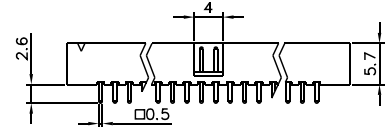

### Ordering Information

C118-B - 40 T S K

Series No. —  
 No. of Pins: 10,12,14,16,20,26,30,34,40,50,60,64  
 Contact Plating: T - Tinned Terminal & Gold Contact  
 G - Gold Flash All Over

Insulator Colour: K - Black  
 G - Gray  
 Pin Direction: S - Straight  
 R - Right Angle

Pos.	A	B	C	Pos.	A	B	C
10	17.2	16.1	8.0	30	37.2	36.1	28.0
12	19.2	18.1	10.0	34	41.2	40.1	32.0
14	21.2	20.1	12.0	40	47.2	46.1	38.0
16	23.2	22.1	14.0	50	57.2	56.1	48.0
20	27.2	26.1	18.0	60	67.2	66.1	58.0
26	33.2	32.1	24.0	64	71.2	70.1	62.0