


C120 Series

**FPC Connector, 2.54mm(0.100"),
Dip**


Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

<Straight>

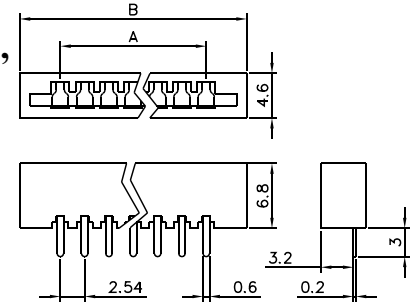

<Right Angle>

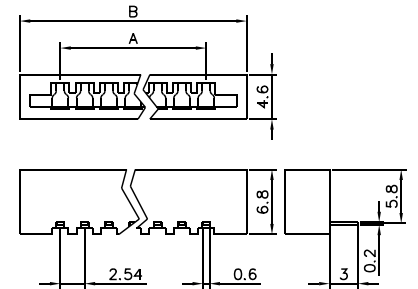

Ordering Information

C120 - 40 T S K

Series No. | Insulator Colour:
 K - Black
 G - Gray
 No. of Pins: | Pin Direction:
 10,12,14,16,20,26, | S - Straight
 30,34,40,50,60,64 | R - Right Angle
 Contact Plating:
 T - Tinned Terminal &
 Gold Contact
 G- Gold Flash All Over

Pos.	A	B	Pos.	A	B	Pos.	A	B
08	17.78	25.26	19	45.72	53.20	30	73.66	81.14
09	20.32	27.80	20	48.26	55.74	31	76.20	83.68
10	22.86	30.34	21	50.80	58.28	32	78.74	86.22
11	25.40	32.88	22	53.34	60.82	33	81.28	88.76
12	27.94	35.42	23	55.88	63.36	34	83.82	91.30
13	30.48	37.96	24	58.42	65.90	35	86.36	93.84
14	33.02	40.50	25	60.96	68.44	36	88.90	96.38
15	35.56	43.04	26	63.50	70.98	37	91.44	98.92
16	38.10	45.58	27	66.04	73.52	38	93.98	101.46
17	40.64	48.12	28	68.58	76.06	39	96.52	104.00
18	43.18	50.66	29	71.12	78.60	40	99.06	106.54