

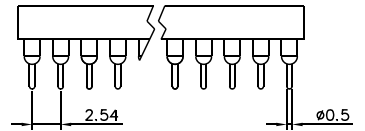


C126 Series

Dip IC Socket, 2.54mm(0.100"), Round Pin

Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0



Ordering Information

C126 - 6 40 R G - 1

Series No. _____
 Row Spacing: _____
 3 - 7.62mm
 6 - 15.24mm
 No. of Pins: _____
 06,08,14,16,18,
 20,24,28,32,40,42
 Round Pin _____
 Deviation: _____
 1 or 2,
 Only for 24 & 28 Pos.
 Contact Plating:
 G - All Gold Plated
 T - Tinned Tail
 & Gold Plated Hole

Pos.	A	B	C	D	Pos.	A	B	C	D
06	7.62	5.08	10.16	7.62	24-2	30.48	27.94	17.78	15.24
08	10.16	7.62	10.16	7.62	28-1	35.56	33.02	10.16	7.62
14	17.78	15.24	10.16	7.62	28-2	35.56	33.02	17.78	15.24
16	20.32	17.78	10.16	7.62	32	40.54	38.10	17.78	15.24
18	22.86	20.32	10.16	7.62	40	50.80	48.26	17.78	15.24
20	25.40	22.86	10.16	7.62	42	53.21	50.80	17.78	15.24
24-1	30.48	27.94	10.16	7.62					