


C128 Series

PLCC Socket, Dip Type

Specifications:

Contact Resistance: $30\text{m}\Omega @ 100\text{mA DC}$
 Insulator Resistance: $1000\text{M}\Omega\text{min. @ } 500\text{V DC}$
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact: Phosphor Bronze, Stamped
 Housing: PPS(40% Glass Fiber), UL94V-0
 or PBT(30% Glass Fiber), UL94V-0

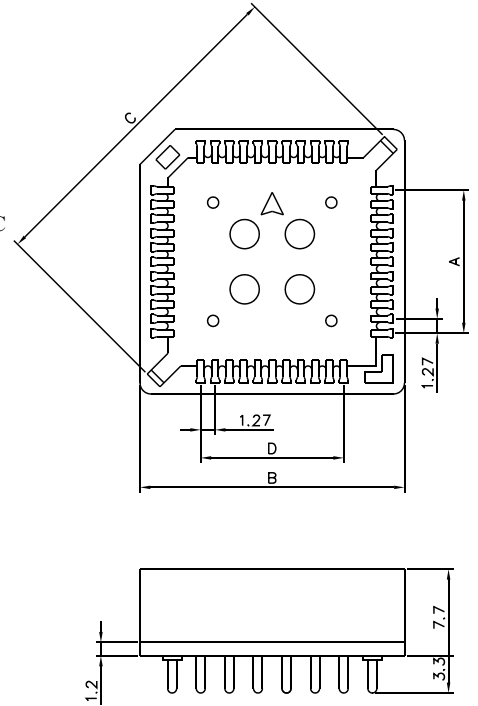

Ordering Information

C128 - 44 B T
 Series No. _____
 No. of Pins: 28,32,44,52,68,84
 Contact Plating: T - Tinned
 Insulator Material: A - PPS
 B - PBT

Positions	A	B	C	D
28	7.62	18.10	22.20	12.70
32	7.62	18.80	25.70	10.16
44	12.70	23.50	29.80	17.78
52	15.24	26.00	32.64	20.32
68	20.32	30.20	40.10	25.40
84	25.40	35.20	46.90	30.48