





C131 Series

**Sip Socket, 2.54(0.100"),
Screw Machined Pin**

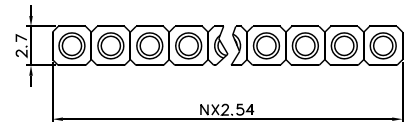

Specifications:

Contact Resistance: 15m Ω @ 100mA DC
 Insulator Resistance: 1000M Ω min. @ 500V DC
 Current Rating: 1AMP
 Voltage: 250V AC For 1 minute
 Operating Temperature: -55 $^{\circ}$ C~+105 $^{\circ}$ C
 Contact: BeCu, Stamped
 Housing: PPS(40% Glass Fiber), UL94V-0

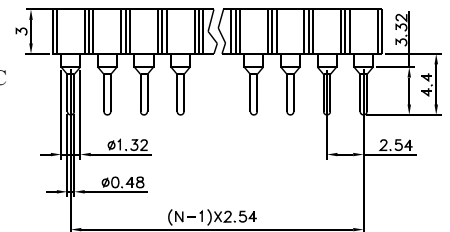

Ordering Information

C131 - S 30 05

Series No.	S - Single Row	Contact Plating(Gold):	05 - 5u"
No. of Pins:			10 - 10u"
	01~40 for Single Row		20 - 20u"
			30 - 30u"