



### Ordering Information

C211 - SA

Series No.      Shielding Metal:  
 Tail Orientation:      A - W/O Metal Shield  
 S - Standard      B - Metal Shield  
 R - Reverse


# C211 Series

## Scart Socket, Right Angle, Boardlock


### Specifications:

Contact Resistance: 100mΩ @ 100mA DC  
 Insulator Resistance: 1000MΩmin. @ 500V DC  
 Current Rating: 3 AMP  
 Voltage: 1000V AC For 1 minute  
 Operating Temperature: -55°C~+105°C  
 Contact: Brass or Phosphor Bronze, Tin Plated  
 Housing: PC or ABS, UL94V-0

### PCB Layout

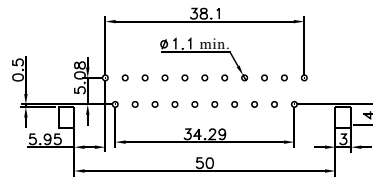

### <Standard Type>

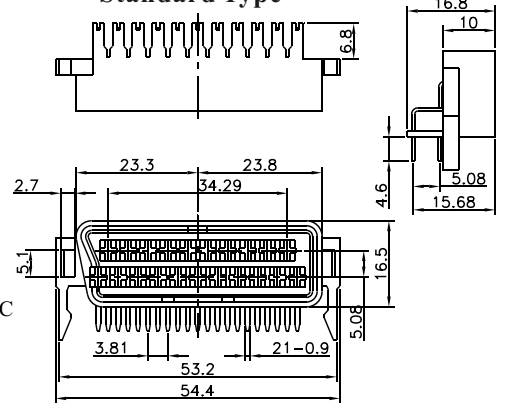

### <Reverse Type>

