



C212 Series

Scart Socket, Right Angle, Boardlock, Side Holes

Specifications:


Contact Resistance: 100mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 3AMP
 Voltage: 1000V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Tin Plated
 Housing: PC or ABS, UL94V-0

Ordering Information


C214 - SAA

- Series No. _____
 - Tail Orientation: _____
 - Additional Form: _____
 - Shielding Metal: _____
- S - Standard
 A - Ø3.8 Mounting Holes
 B - Ø2.6 Mounting Holes
 A - W/O Metal Shield
 B - Metal Shield

PCB Layout

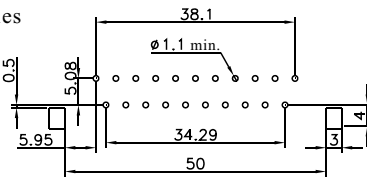

<3.8mm Mounting Holes>

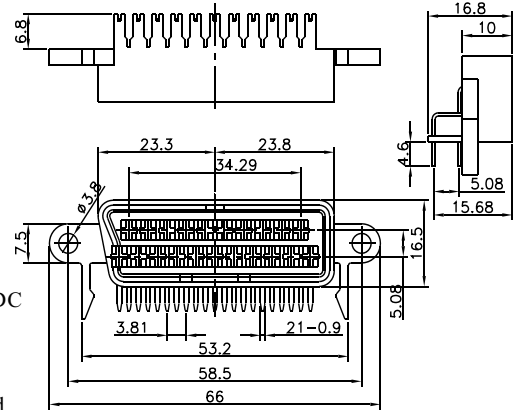

<2.6mm Mounting Holes>

