



Ordering Information

C214 - S
 Series No. Tail Orientation:
 S - Standard
 R - Reverse


C214 Series

Scart Socket, Right Angle, W/O Boardlock


Specifications:

Contact Resistance: 100mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 3AMP
 Voltage: 1000V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Tin Plated
 Housing: PC or ABS, UL94V-0

PCB Layout



<Standard Type>

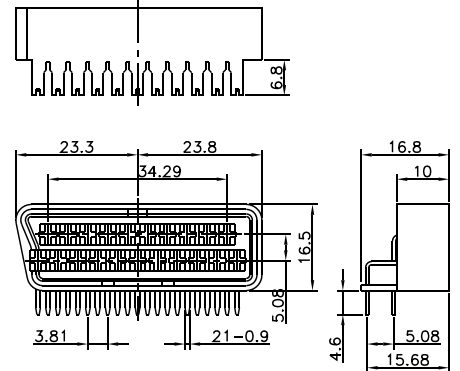

<Reverse Type>

