




# C221 Series

## Double Scart Socket, Right Angle, Central Hole

### Specifications:

Contact Resistance: 100mΩ @ 100mA DC  
 Insulator Resistance: 1000MΩmin. @ 500V DC  
 Current Rating: 3AMP  
 Voltage: 1000V AC For 1 minute  
 Operating Temperature: -55°C~+105°C  
 Contact: Brass or Phosphor Bronze, Tin Plated  
 Housing: PC or ABS, UL94V-0

### Ordering Information

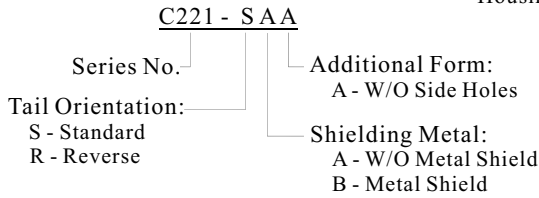

### PCB Layout

