




C222 Series

Double Scart Socket, Right Angle, Side Holes

Specifications:

Contact Resistance: 100mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 3AMP
 Voltage: 1000V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Tin Plated
 Housing: PC or ABS, UL94V-0

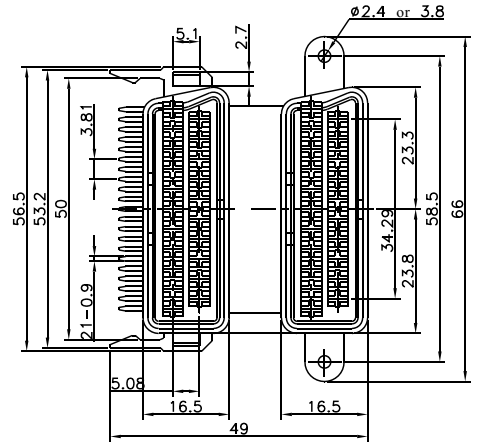

Ordering Information

C222 - SAA

- Series No. _____
- Tail Orientation: _____
- Shielding Metal: _____
- Additional Form: _____
- Mounting Holes, $\phi 2.4$
- Mounting Holes, $\phi 3.8$

PCB Layout

