




# C223 Series

## Double Scart Socket, Right Angle, Central & Side Holes

### Specifications:

Contact Resistance: 100mΩ @ 100mA DC  
 Insulator Resistance: 1000MΩmin. @ 500V DC  
 Current Rating: 3AMP  
 Voltage: 1000V AC For 1 minute  
 Operating Temperature: -55°C~+105°C  
 Contact: Brass or Phosphor Bronze, Tin Plated  
 Housing: PC or ABS, UL94V-0

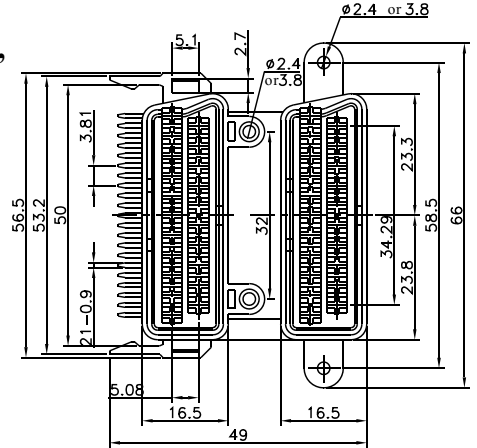

### Ordering Information

C223 - SAA

- Series No. \_\_\_\_\_
  - Tail Orientation: \_\_\_\_\_
  - Shielding Metal: \_\_\_\_\_
  - Additional Form: \_\_\_\_\_
- S - Standard  
 R - Reverse  
 A - W/O Metal Shield  
 B - Metal Shield
- A - Central & Side Screw Mounting Holes, Ø2.4  
 B - Central & Side Screw Mounting Holes, Ø3.8

### PCB Layout

