

High efficiency, three-digit numeric displays


LB-303AK Series

The LB-303AK series were designed to meet the need for multi-digit numeric displays. These LED numeric displays use GaAsP on GaP for the emitting material (with the exception of green) and are housed in an epoxy resin package. They are three-digit displays with a character height of 8.0 mm.

●Features

- 1) Height of character : 8.0 mm
- 2) High efficiency in a compact package.
- 3) Common anode and common cathode configurations are available for red, orange and green.
- 4) The package surface is painted black and the segments are colored the display color.

●External dimensions (Units : mm)

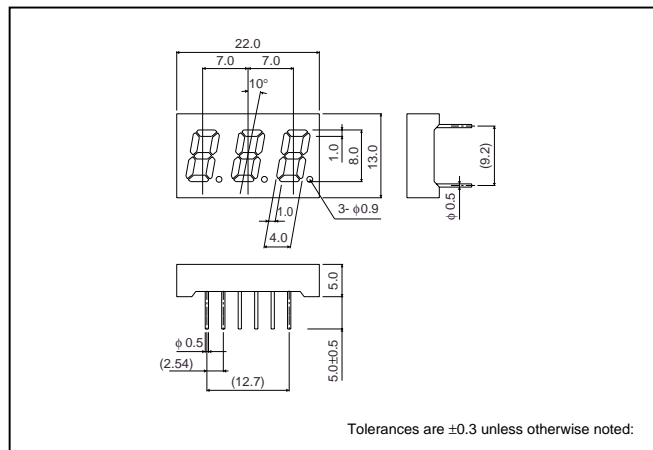


●Selection guide

Emitting color	Red	Orange	Green
	Common		
Anode	LB-303VA	LB-303DA*	LB-303MA
Cathode	LB-303VK	LB-303DK*	LB-303MK

*Order-based production.


●Pin assignments

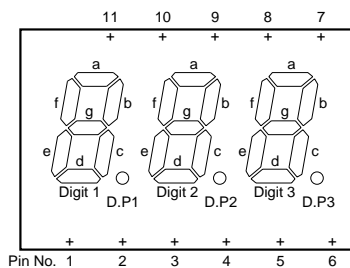

Pin No.	Function
1	Segment "c"
2	Digit 1 Common
3	Segment "d"
4	Digit 2 Common
5	Digit 3 Common
6	Segment D.P
7	Segment "b"
8	Segment "f"
9	Segment "a"
10	Segment "e"
11	Segment "g"

LED displays

● Internal circuit schematic (example of common anode)

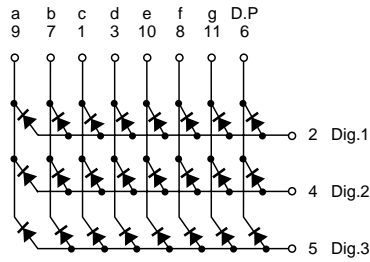

● Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Red	Orange	Green	Unit
		LB-303VA / VK	LB-303DA / DK	LB-303MA / MK	
Power dissipation	P_D	960	960	1440	mW
Power dissipation	P_D / seg	40	40	60	mW
Forward current	I_F	15	15	20	mA
Peak forward current	I_{FP}	60*	60*	60*	mA
Reverse voltage	V_R	3	3	3	V
Operating temperature	T_{opr}	-25~+75			°C
Storage temperature	T_{stg}	-30~+85			°C

* Pulse width 1ms duty 1 / 5

● Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Red			Orange			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V_F	$I_F = 10\text{mA}$	-	2.0	2.8	-	2.0	2.8	-	2.1	2.8	V
Reverse current	I_R	$V_R = 3\text{V}$	-	-	100	-	-	100	-	-	100	μA
Peak wavelength	λ_P	$I_F = 10\text{mA}$	-	650	-	-	610	-	-	563	-	nm
Spectral line half width	$\Delta\lambda$	$I_F = 10\text{mA}$	-	40	-	-	40	-	-	40	-	nm

© Not designed for radiation resistance.

● Luminous intensity

Color	λ_P	Type	Min.	Typ.	Max.	Unit
Red	650	LB-303VA	1.4	4.0	-	mcd
		LB-303VK				
Orange	610	LB-303DA	1.4	4.0	-	mcd
		LB-303DK				
Green	563	LB-303MA	2.2	6.3	-	mcd
		LB-303MK				

Note : Measured at $I_F = 10\text{mA}$